





Dual N-Channel Enhancement Mode Field Effect Transistor

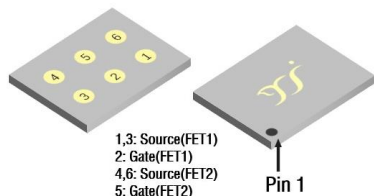

Product Summary

• V_{SS}	12V
• I_S	7.5A
• $R_{SS(ON)}$ (at $V_{GS}=4.5V$)	$<5.5m\Omega$
• $R_{SS(ON)}$ (at $V_{GS}=3.8V$)	$<6.2m\Omega$
• $R_{SS(ON)}$ (at $V_{GS}=3.1V$)	$<7.5m\Omega$
• $R_{SS(ON)}$ (at $V_{GS}=2.5V$)	$<12m\Omega$

General Description

- Extremely Low $R_{SS(ON)}$
- ESD HBM Class 2
- Common Drain Design
- RoHS compliant
- Halogen-free

Applications

- Battery Protection

■ Limiting Values

Parameter	Conditions		Symbol	Min	Max	Unit
Source-source Voltage			V_{SS}	-	12	V
Gate-source Voltage			V_{GS}	-8	8	
Continuous Source Current (Note 1,2)	Steady-State	$T_A=25^{\circ}C, V_{GS}=4.5V$	I_S	-	7.5	A
		$T_A=100^{\circ}C, V_{GS}=4.5V$		-	4.7	
Pulsed Source Current	$T_A=25^{\circ}C, t_p \leq 10\mu s$		I_{SM}	-	30	
Maximum Body-Diode Continuous Current	$T_A=25^{\circ}C$		I_S		7.5	
Total Power Dissipation (Note 1,2)	Steady-State	$T_A=25^{\circ}C$	P_D	-	0.5	W
Junction and Storage Temperature Range			T_J, T_{STG}	-55	150	$^{\circ}C$

■ Thermal Resistance

Parameter		Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient (Note 2)	Steady-State	$R_{\theta JA}$	-	250	$^{\circ}C/W$

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJZ5D5N012AJ	F1	5D5N012AJ	5000	/	/	Tape Reel



YJZ5D5N012AJ

■ Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Source-Source Breakdown Voltage	BV _{SSS}	V _{GS} =0V,I _S =250μA,T _J =25℃	12	-	-	V
Zero Gate Voltage Source Current	I _{SSS}	V _{SS} =12V,V _{GS} =0V,T _J =25℃	-	-	1	μA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±8V,V _{SS} =0V,T _J =25℃	-	-	±10	
Gate Threshold Voltage	V _{GS(th)}	V _{SS} =V _{GS} ,I _S =1mA,T _J =25℃	0.55	0.95	1.35	V
Static Source-Source On-Resistance	R _{SS(ON)}	V _{GS} =4.5V,I _S =4A,T _J =25℃	-	4.4	5.5	mΩ
		V _{GS} =3.8V,I _S =4A,T _J =25℃	-	4.9	6.2	
		V _{GS} =3.1V,I _S =4A,T _J =25℃	-	5.9	7.5	
		V _{GS} =2.5V,I _S =4A,T _J =25℃	-	8.7	12	
Diode Forward Voltage	V _{SS}	I _S =4A,V _{GS} =0V,T _J =25℃	-	0.73	1.2	V
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{SS} =10V,V _{GS} =0V,f=1MHz,T _J =25℃	-	1715	-	pF
Output Capacitance	C _{oss}		-	475	-	
Reverse Transfer Capacitance	C _{rss}		-	312	-	
Switching Parameters						
Total Gate Charge	Q _g	V _{GS} =4.5V,V _{SS} =6V,I _S =4A,T _J =25℃	-	22	-	nC
Gate-Source Charge	Q _{gs}		-	5	-	
Gate-Drain Charge	Q _{gd}		-	8	-	
Turn-on Delay Time	t _{D(on)}	V _{GS} =4.5V,V _{SS} =6V,I _S =4A,R _L =1.5Ω, R _{GEN} =3Ω,T _J =25℃	-	3.9	-	ns
Turn-on Rise Time	t _r		-	4.9	-	
Turn-off Delay Time	t _{D(off)}		-	12.2	-	
Turn-off Fall Time	t _f		-	7.8	-	

- Note:
1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
 2. The value of $R_{\theta JA}$ is measured with the device mounted on the single layer FR-4 PCB board with 1 in² pad of 2oz. Copper, in the still air environment with $T_A=25^\circ C$. The maximum allowed junction temperature of 150 $^\circ C$. The value in any given application depends on the user's specific board design.

■ Typical Electrical and Thermal Characteristics Diagrams

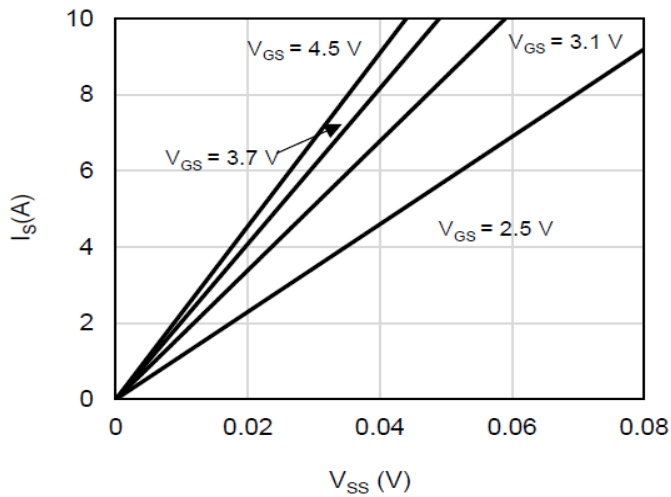


Figure 1. Output Characteristics; typical values

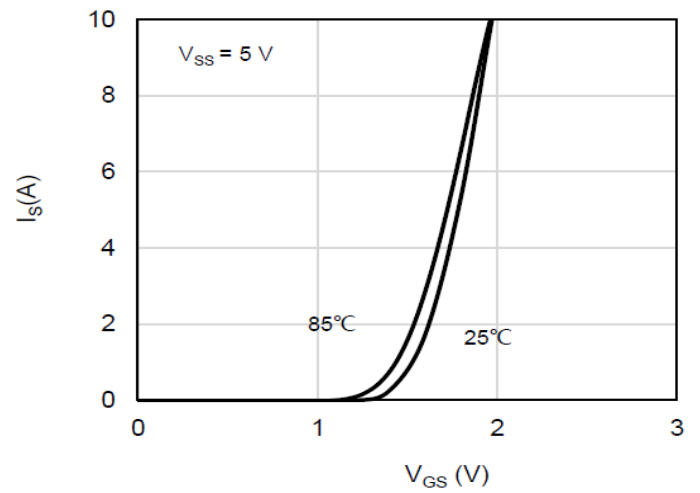


Figure 2. Transfer Characteristics; typical values

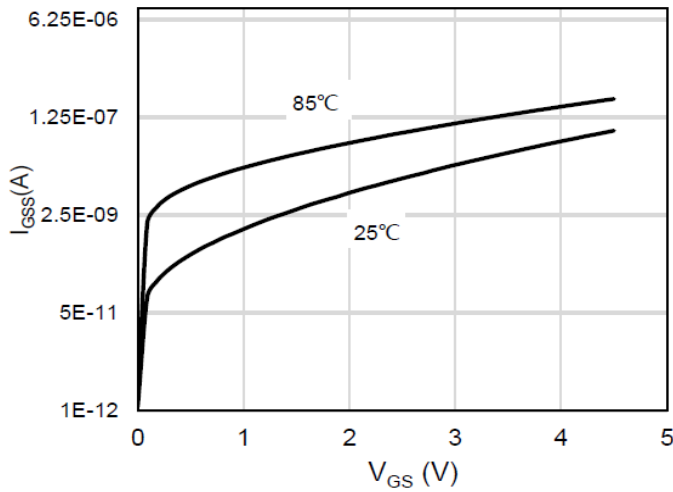


Figure 3. Gate Voltage vs. Gate Leakage Current; typical values

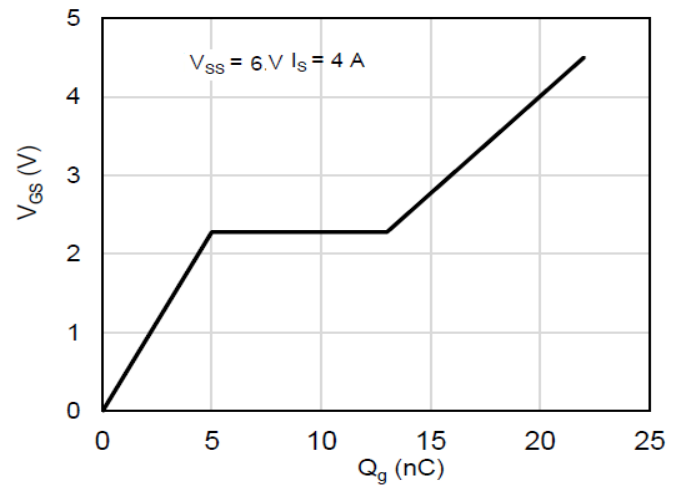


Figure 4. Gate Charge; typical values

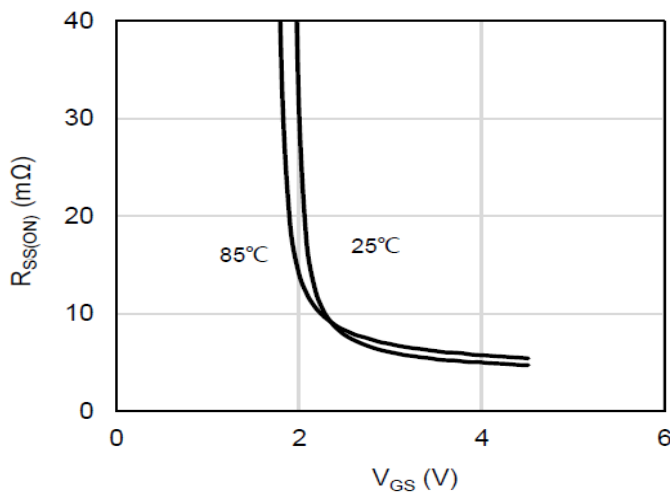


Figure 5. On-Resistance vs. Gate to Source Voltage; typical values

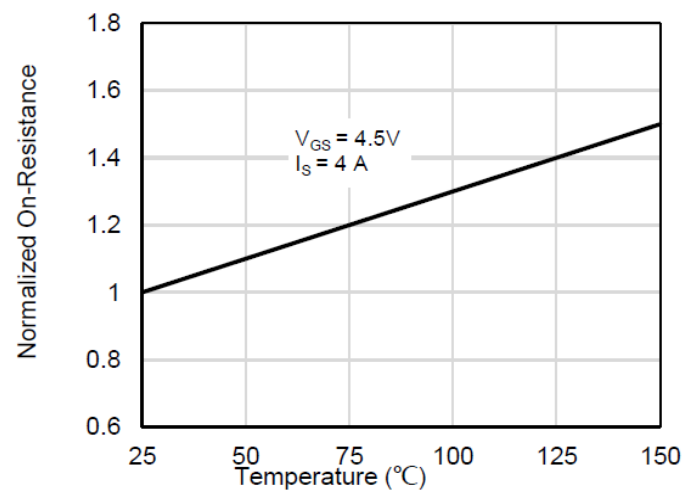


Figure 6. Normalized On-Resistance

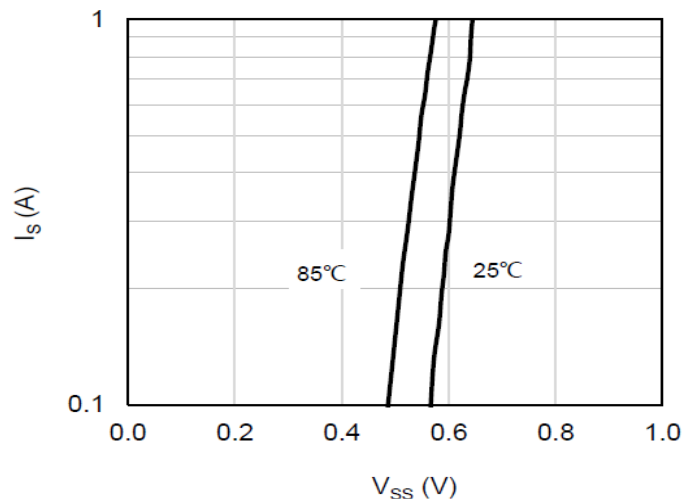
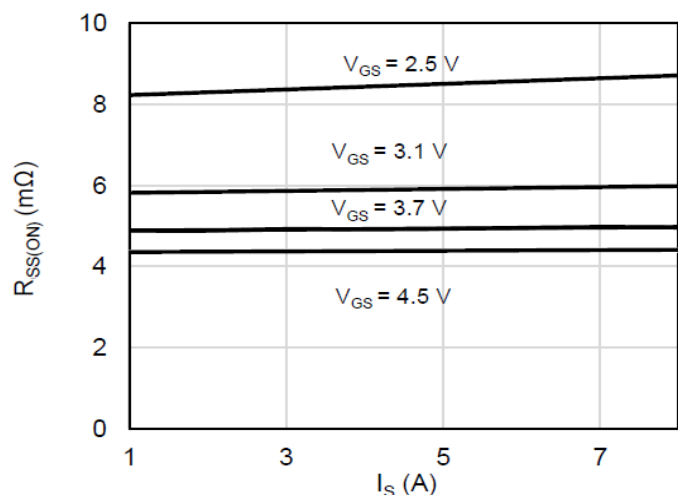


Figure 7. $R_{SS(on)}$ vs. Source Current; typical values

Figure 8. Forward characteristics of reverse diode; typical values

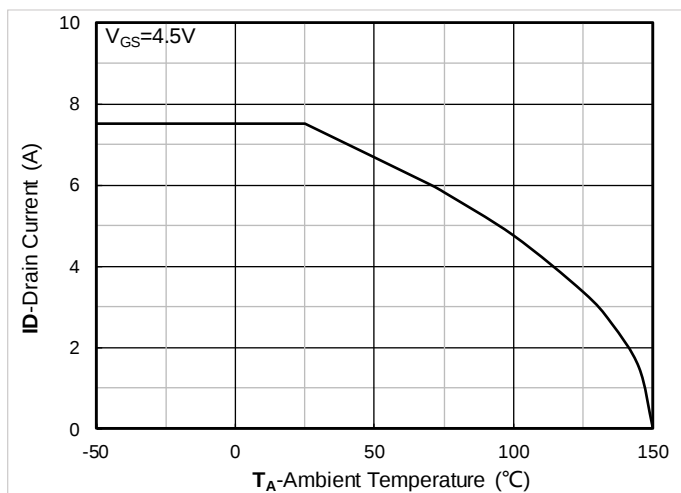


Figure 9. Current dissipation

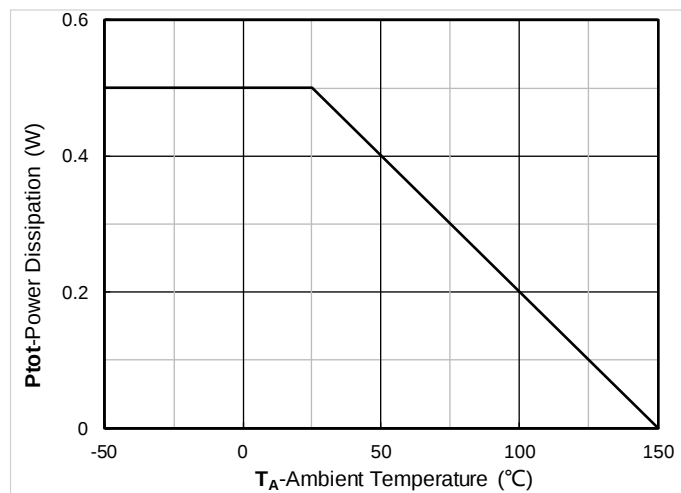


Figure 10. Power dissipation

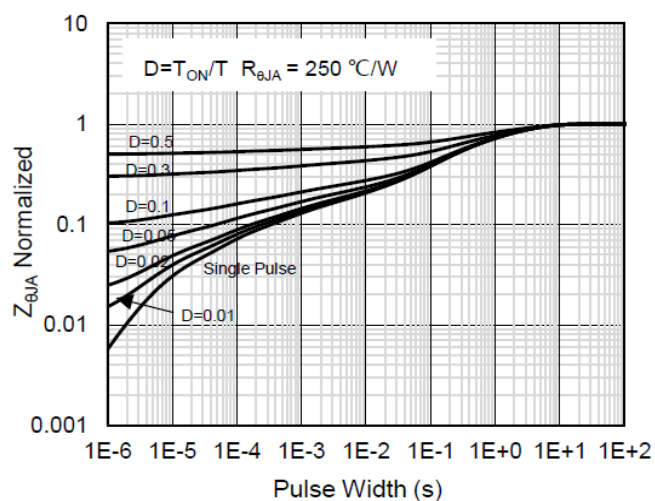


Figure 11. Normalized Maximum Transient Thermal Impedance

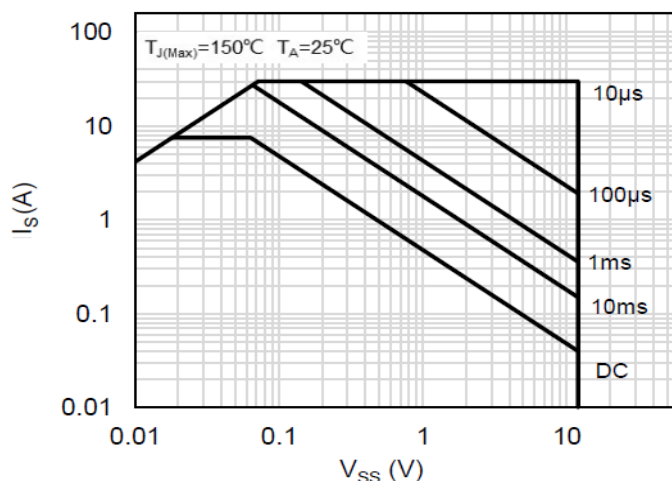


Figure 12. Safe Operation Area

■ Test Circuits & Waveforms

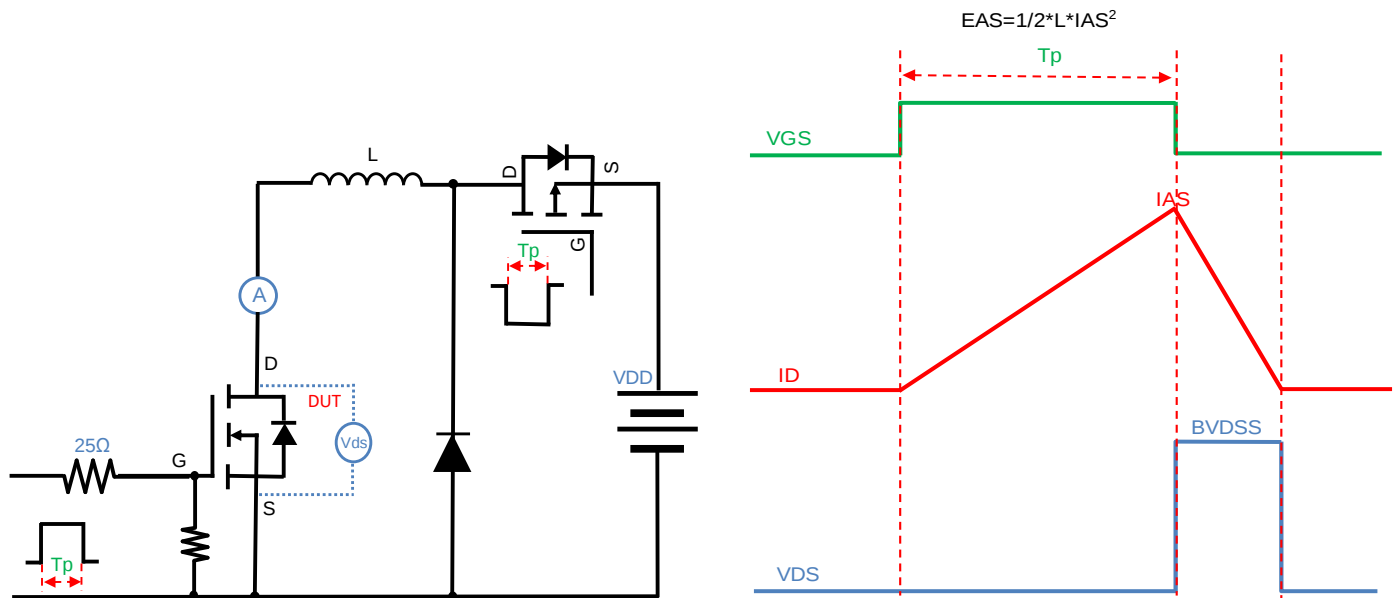


Figure A. Unclamped Inductive Switching (UIS) Test Circuit & Waveform

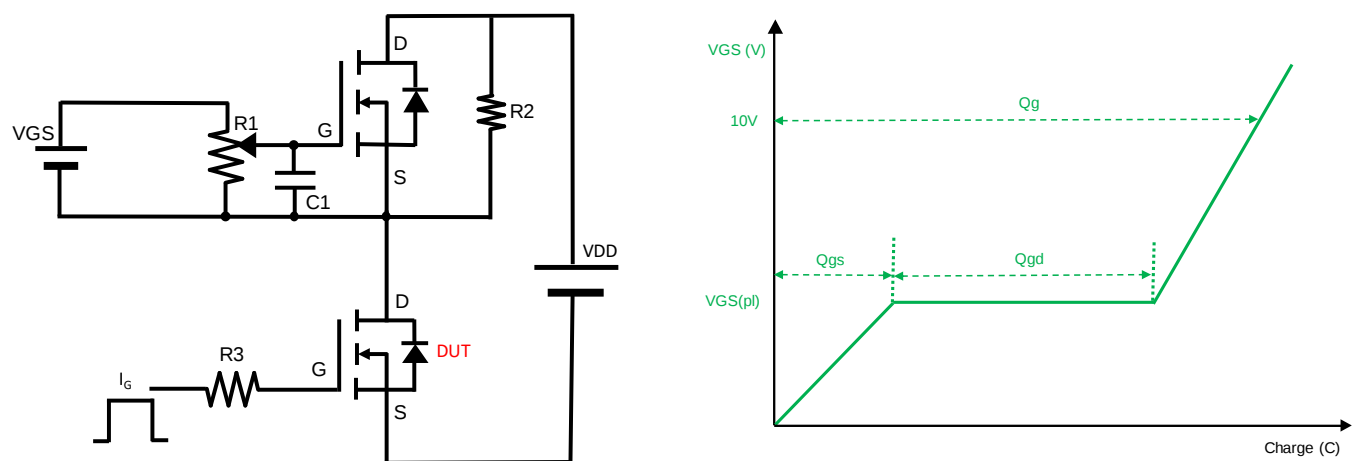


Figure B. Gate Charge Test Circuit & Waveform

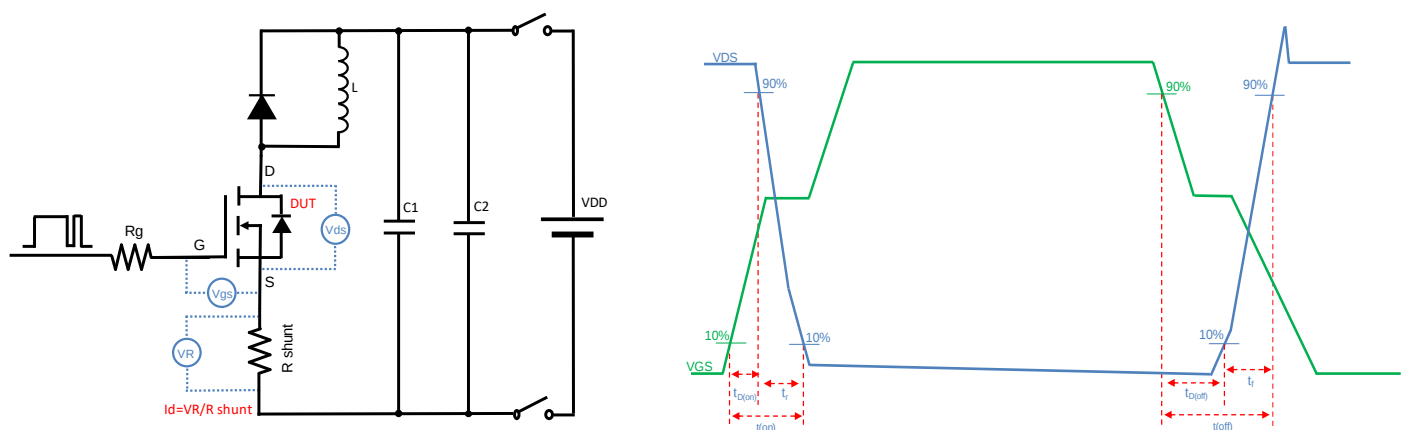


Figure C. Resistive Switching Test Circuit & Waveform


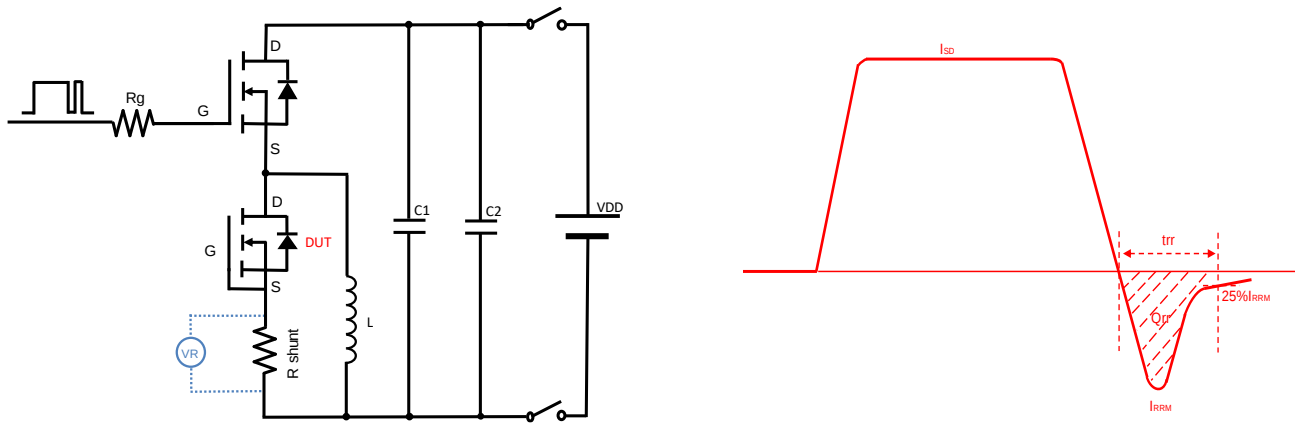


Figure D. Diode Recovery Test Circuit & Waveform




YJZ5D5N012AJ

■ WLCSP-6L Package information

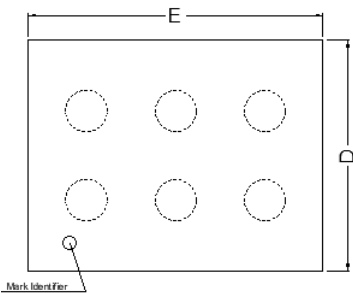


TOP VIEW

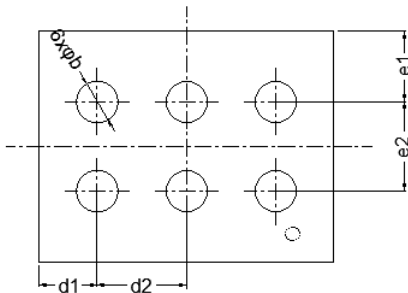


BOTTOM VIEW

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.0020	0.0059	0.050	0.150
b	0.0118TYP		0.300TYP	
D	0.0638	0.0677	1.620	1.720
d1	0.0165TYP		0.420TYP	
d2	0.0256TYP		0.650TYP	
E	0.0823	0.0862	2.090	2.190
e1	0.0201TYP		0.510TYP	
e2	0.0256TYP		0.650TYP	



SIDE VIEW




SUGGESTED SOLDER LAYOUT

UNIT: mm



■ Marking Information

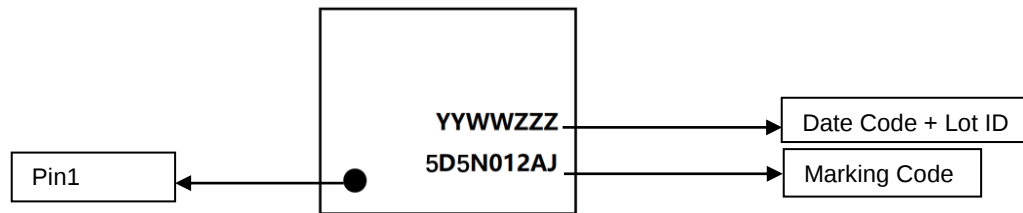

Note:

1. All marking is at middle of the product body
2. All marking is in laser printing
3. 5D5N012AJ is marking code, YYWWZZZ is date code&Lot ID, "YY" is year, "WW" is week, "ZZZ" is Lot ID
4. Body color: Black



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com> , or consult your nearest Yangjie's sales office for further assistance.